

Stifle Fitting with hyperextension cuff and paw




1. Place leg through space in brace from the back.



2. Push the paw into the paw segment. The middle toes should "drag" over the tip as you are pushing.




3. While holding the paw in the desired position, fasten the bottom strap SNUG. If you have another strap above that strap, fasten that one as well

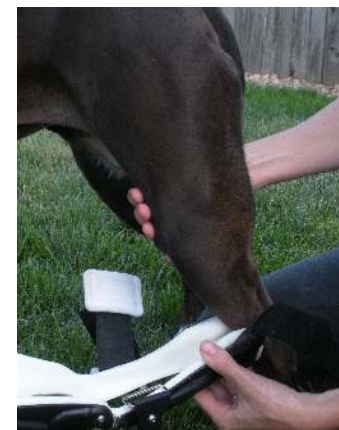


4. Starting at a 90-degree angle, apply the brace over the hock. Then roll the brace onto the knee



5. Fasten the padded strap that goes around the Achilles. Do not pull too tight, as you will irritate the Achilles tendon

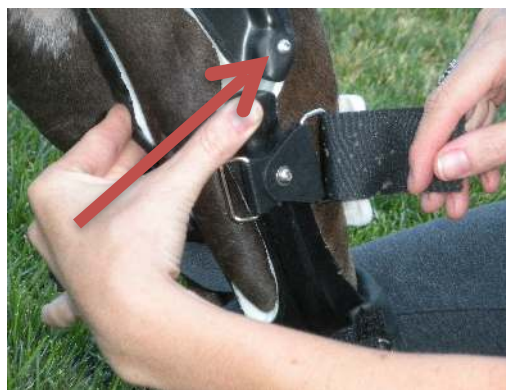

6. Push knee hinges onto the knee as far as you can. While holding the brace in that position, fasten the back middle strap SNUG

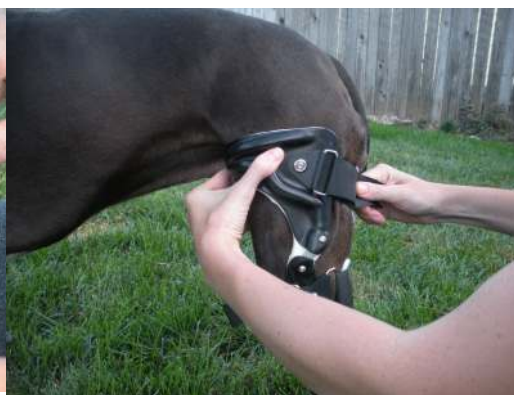

7. Push thigh cuff onto leg. Squeeze brace inward and fasten top strap SNUG



8. Fasten front knee strap. Do not pull too tight or you will pull the brace forward off the knee. The pad should be directly touching the tibia (shin)